


515-244-0770

## SL175 Panel



- 14" Coverage in 26ga.
- 14", 16", 18" Coverage in 24ga.
- 1 3/4" Snap-Lock Rib
- Minimum Recommended Slope: 2:12
- 32 PVDF Stock Colors+Galvalume in 24ga.
- UL Class A Fire Rating
- UL Class IV Impact Rating

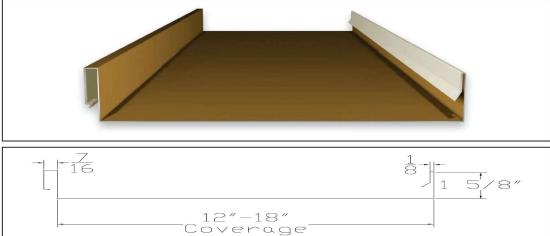

SL175 is an excellent structural standing seam roof panel that can be used in various roof, mansard, and fascia applications. Its design allows it to be applied to various solid substrates and even open purlins. This panel offers hidden clips and a snap-lock seam, which takes away the need for job site seaming. It is available in 32 PVDF colors in 24ga, and 19 WXL and 5 PVDF colors in 26 ga. The minimum recommended slope is 2:12 with sealant.